

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 024 371 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
01.12.2004 Bulletin 2004/49

(51) Int Cl.7: **G01R 33/56, G01R 33/48,
G01R 33/54**

(21) Application number: **99309547.0**

(22) Date of filing: **29.11.1999**

(54) Magnetic resonance imaging apparatus

Gerät zur Bilderzeugung mittels magnetischer Kernresonanz

Appareil d'imagerie par résonance magnétique nucléaire

(84) Designated Contracting States:
DE FR NL

(30) Priority: **24.12.1998 GB 9828425**

(43) Date of publication of application:
02.08.2000 Bulletin 2000/31

(73) Proprietor: **Philips Medical Systems (Cleveland),
Inc.
Cleveland, Ohio 44143 (US)**

(72) Inventor: **Hajnal, Joseph Vilmos
London NW3 4PY (GB)**

(74) Representative:
**van der Veer, Johannes Leendert et al
Philips
Intellectual Property & Standards
P.O. Box 220
5600 AE Eindhoven (NL)**

(56) References cited:
**EP-A- 0 430 322 EP-A- 0 654 675
US-A- 5 631 560**

- **KORIN H W ET AL: "COMPENSATION FOR
EFFECTS OF LINEAR MOTION IN MR IMAGING"
MAGNETIC RESONANCE IN
MEDICINE,US,ACADEMIC PRESS,DULUTH,MN,
vol. 12, no. 1, 1 October 1989 (1989-10-01), pages
99-113, XP000081157 ISSN: 0740-3194**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to magnetic resonance (MR) imaging apparatus.

[0002] In magnetic resonance imaging, the subject to be imaged is positioned in a strong magnetic field, for example, produced in the bore of a superconducting electromagnet, and the protons of hydrogen atoms (and of other MR active nuclei) in water and fat align parallel and anti-parallel to the main magnetic field, precessing around the direction of the field at the Larmor frequency.

[0003] A transmit coil applies pulses of r.f. energy at the Larmor frequency in a direction orthogonal to the main field to excite precessing nuclei to resonance, which results in the net magnetisation of all MR active nuclei being flipped from the direction of the main magnetic field into a direction having a transverse component in which it can be detected by the use of a receive coil.

[0004] The received signal can be spatially encoded to produce two-dimensional (slice) or three-dimensional (slab) information about the distribution of MR active nuclei and hence of water and tissue.

[0005] The received signal can be confined to a slice of the patient in the following way.

[0006] Referring to Figures 1 and 2, a superconducting electromagnet 1 (seen in side view in Figure 1 and in end view in Figure 2) has a bore 2 for receiving a patient supported on a couch 3 which can be slid into the bore of the magnet from a position outside. By making the strength of the main magnetic field vary along the length of the bore (the z-axis) using magnetic field gradient coils to increase and/or decrease the main magnetic field, it is possible to excite MR active nuclei (the remainder of this description refers hydrogen nuclei as an example) confined to a slice orthogonal to the z-direction, since the Larmor frequency depends upon the strength of the magnetic field, and the frequency of the r.f. pulse can be chosen to correspond to that frequency. (Gradients could equally be set up to excite slices orthogonal to the x or y axes).

[0007] Spatial encoding of the slice can be produced by x and y magnetic field gradient coils which alter the strength, but not the direction, of the main magnetic field, in the x and y-directions. The frequency and phase information in the received signal can be analysed to map the distribution of the hydrogen nuclei in the plane of the slice.

[0008] Slab (or three-dimensional) imaging can be performed by commonly exciting a region with the r.f. excitation pulses that is to be divided into a contiguous series of slices using the phase of the received signal to distinguish between these different slices.

[0009] It is also known to image contiguous slabs, particularly when attempting to trace vessels such as blood vessels. In one known MRI apparatus, in order to be able to image along the length of the leg, three separate slab images are recorded. The patient is moved to three

separate axial positions for the data to be captured. The three images are then joined together. However, there are discontinuities in the images when viewed in a projection normal to the slab boundaries, which is just the direction in which vessels would be viewed in.

[0010] It might be wondered why the three multi-slab images could not be acquired without moving the patient, since the length of the bore of the superconducting electromagnet is typically much greater than the length of a leg. However, the region of good field over which the field is sufficiently uniform to obtain acceptable undistorted images is much smaller than the overall length of the bore. Typically, the region of good field would be an approximately spherical volume 4 in the centre of the bore.

[0011] US 5 631 560 (disclosing an apparatus according to the preamble of claim 1) discloses a magnetic resonance imaging apparatus in which data are acquired while the position of a signal acquisition region is moved in an imaging area. In the method of US 5.631.560 the slab is slightly moved in each encode step and imaging is performed with the slabs (selective excitation regions) uniformly distributed in an entire imaging region. The slab is gradually moved to allow the slab boundaries to uniformly distribute all over the imaging region. In imaging a field of view wider than the imaging region of a magnetic coil, after data are acquired while the top plate of a bed is continuously moved, processing for minimizing the discontinuity of the data is performed. Sets of data obtained during one encode cycle are arranged in an order in which subsequent sets of data are displaced along the direction of motion that corresponds to the displacement of the patient during one encode cycle.

[0012] Document EP 0 654 675 discloses a magnetic resonance method comprising creating a uniform, temporally constant magnetic field in a thin imaging volume; moving a subject through the thin imaging volume; while the subject is moving through the thin imaging volume, exciting and manipulating magnetic resonance signals from the selected slice. The method further includes shifting the selected slice relative to the imaging volume such that the selected slice remains substantially fixed relative to the subject.

[0013] Advantageously, volumetric data samples are encoded with secondary phase encoding in the direction of motion of the patient support and with primary phase encoding which may have a greater number of increments in a transverse direction, the correcting means being arranged to compensate successive sets of samples of all secondary phases produced at each primary phase for the motion.

[0014] Furthermore, the correction means take into account the motion of the patient while a set of data points for a first encode step of primary phase encoding is acquired resulting in an apparatus according to the invention as defined in claim 1.

[0015] Ways of carrying out the invention will now be described in greater detail, by way of example, with ref-

erence to the accompanying drawings, in which:

Figure 1 is a simplified side view of a known magnetic resonance imaging apparatus;

Figure 2 is a simplified end view of a known magnetic resonance imaging apparatus;

Figure 3 is a simplified side view of a magnetic resonance imaging apparatus according to the invention;

Figure 4 is a perspective view of a slab to be imaged in the magnetic resonance imaging apparatus of Figure 3;

Figure 5a illustrates schematically the r.f. pulse of a pulse sequence of the magnetic resonance imaging apparatus of Figure 3;

Figure 5b illustrates schematically the z-gradient pulse of the pulse sequence of the magnetic resonance imaging apparatus of Figure 3;

Figure 5c illustrates schematically the x-gradient pulse of the pulse sequence of the magnetic resonance imaging apparatus of Figure 3;

Figure 5d illustrates schematically the y-gradient pulse of the pulse sequence of the magnetic resonance imaging apparatus of Figure 3;

Figure 6a is a perspective view of a three-dimensional array of data samples in k-space;

Figure 6b is a front view of a two-dimensional array of data sample in k-space corresponding to a single slice of the three-dimensional array of Figure 6a;

Figure 7a shows a square object seen in plan view about to pass through the region of good field of the magnetic resonance imaging apparatus of Figure 3;

Figure 7b shows a representation of the object in the x,z plane in k-space;

Figure 7c shows a representation of the object in the x,z plane in the hybrid dimension of k-space and real space;

Figure 7d shows the representation of Figure 7c but with distortion to the representation in the z-direction for the purposes of explanation;

Figure 8 is a plan view of slabs of a data collection volume passing through the region of good field in Figure 3; and

Figure 9 is a block diagram showing the architecture of the data processing circuitry of the imaging apparatus of Figure 3.

5 [0016] Like parts have been given like reference numerals throughout all the figures.

[0017] Referring to Figure 3, the magnetic resonance imaging apparatus of the invention comprises an electromagnet 1 which is superconducting, but could if desired be resistive. The magnet has a bore 2. Those parts of a patient on a couch 3 which are desired to be imaged are translated through a region of good field of the magnet 5, in which the magnetic field is sufficiently uniform for imaging to be possible with acceptable spatial distortion.

15 [0018] In accordance with the invention, a motor 6 is provided for moving the couch 3 from a reception position outside the bore into the bore such that the parts of the patient to be imaged are translated through the region of good field 5. And, referring to Figure 9, correction means 7 are provided for correcting the data samples collected to compensate for this motion.

[0019] The superconducting magnet of the imaging apparatus has a main field in the z-direction and is provided with a z-gradient coil for setting up a magnetic field gradient along the z-direction. X and y-gradient coils are also provided to enable magnetic field gradients to be set up in the x and y-directions as required.

20 [0020] An r.f. transmit coil 9 is provided to apply r.f. excitation pulses to restricted regions within the region of good field 5, and an r.f. receive coil 10 is provided to detect the resulting relaxation signals, which are digitised in A-D converter 11 and fed to digital signal processor 12 which assembles a notional three-dimensional array of data in k-space. Three-dimensional Fourier transformation takes place in digital signal processor 13 to convert the k-space array to an array in real space, and this data is passed to display 14.

35 [0021] Referring to Figure 4, consider a slab of volume within the region of good field 5 which it is desired to image. The pulse sequence is shown in Figures 5a to 5d. In each repetition time (TR), an r.f. pulse, typically of flip angle between 10 and 50° is applied to the patient of which the region shown in Figure 4 defines a slab, and the resulting echo signals are received while a magnetic field gradient in the y-frequency encode direction is being applied. This means that the echo signals, which consist of a combination of frequencies, can be analysed by Fourier transformation to detect the distribution of hydrogen nuclei in the y-direction. Accordingly, the y-direction is frequency encoded (Fy) in Figure 4. The readout gradient Gy is preceded by a negative lobe to cancel the dephasing of spins produced during the readout portion. The other transverse direction, the x-direction, is decoded by means of phase encoding, denoted by Px. Typically there may be 256 increments of phase, and a separate readout Gy is performed for each of them.

[0022] The longitudinal position of the particular slice being imaged is determined by the z-gradient (Figure 5b) but, since this is slab imaging, in fact a contiguous series of slices are encoded, and so the G_z gradient energises hydrogen nuclei in the slab illustrated in Figure 4. To distinguish one slice in the slab from the next, a series of secondary phase encode gradients are applied, for each primary phase encode increment in the x-direction. That is, the slab excitation pulse G_z is followed by a second gradient pulse in the z-direction which is turned on and then off before read-out takes place, the gradient stepping from a negative value through several increments to a positive value. Typically, there would be 32 such increments. Typically, T_r would be around 10ms. Thus, for one x increment, the time required would be around 320ms to run through the slice select phase encoding gradients. The entire volume would be run through in a period 256 times as long, to allow each of the x phase increments to be executed. In other words, the whole volume shown in Figure 4 would be scanned on this basis in around 80 seconds.

[0023] The time varying echo samples do not directly represent hydrogen nuclei distribution, but fill a three-dimensional array in so-called k-space shown in Figure 6a, where dimension K_y represents frequency and dimension K_x and K_z represent frequency synthesised from phase encoding. Referring to Figure 6b, which shows one of the slices of the array 6a, each echo signal produces a series of points on one vertical line K_y, and a fresh vertical line is produced at each K_z phase encode increment.

[0024] The k-space of Figure 6a is converted to a representation of the distribution of hydrogen nuclei in real space in digital signal processor 13, by separable Fourier transformation along each of the x,y and z axis.

[0025] The relationship between real space and k-space can be further explained by reference to Figure 7a to 7d. Thus, if one were to imagine that the object being imaged was a square-sided figure, the sides of which are aligned with the x and z-axis in Figure 3, in fact the k-space representation of this would appear as in Figure 7b. After Fourier transformation along the z-axis, the representation in hybrid K_x, real z-space would appear as in Figure 7c, where the array would now consist of points arranged on lines parallel to the z-axis and equal in number to the number of k-phase encode increments. Fourier transformation along the x-axis would yield the square of Figure 7a.

[0026] This correspondence between real space and k-space, and Fourier transformation back to real space is of course well known. However, what is not known is for the patient to be translated through the region of good field 5, in the direction of the axis z, during the process of data collection.

[0027] The effect of this can be considered by reference to Figure 7a. Let us imagine that the time taken to step through all the phase encode increments in the z-direction is sufficiently small that the motion of the four-

sided figure can be ignored. Then, if z₁ and z₂ are the z co-ordinates of the top and bottom limbs of the figure at the first x phase encode increment, say, the most negative, then the top and bottom limbs of the figure will have moved to the position z₃, z₄ by the time data is collected at the most positive x phase encode increment.

[0028] While the data will still form a three-dimensional matrix with orthogonal axes and will therefore follow the pattern of Figure 7c, one could distort the representation of Figure 7c into that of Figure 7d in order to illustrate the translation which has taken place in the four-sided figure between the most negative primary phase encode increment (z₂) and the most positive (z₃).

[0029] If one considers Figure 7c for the case when the four-sided figure is stationary, Fourier transformation in the x-direction to reconstitute the right hand limb of the four-sided figure requires computation using each point at the right hand end of each of the K_x lines. In view of the movement which has taken place while data is being collected, the points which now need to be combined are those under the slant line z₂,z₃ in Figure 7c. Knowledge of the speed of translation of the couch enables this spatial correction to be readily calculated, and this is done in correction means 7. The result of this is that the data in the hybrid space of Figure 7c can be corrected for the motion of the couch.

[0030] In fact, the point z₃ in Figure 7c, as well as representing a displacement related to the speed of movement of the couch, also reflects a phase change dependent upon the speed of the couch. It is then merely necessary, using the Fourier shift theorem, to multiply each point in the k-space array of Figure 6a by an appropriate phase correction to take account of the translation of the volume while the data was being collected. If this phase correction is made, then the correction can be performed wholly in k-space. The spatial correction discussed with relation to Figure 7c on the other hand requires that the z-dimension is first of all Fourier transformed to real space. A description of the use of the Fourier shift theorem used for correction of involuntary motion is magnetic resonance imaging is described in Frequency Domain Simulation of MR Tagging, William R Crum et al, JMIR 1998; 8:1040-1050.

[0031] Considering the three-dimensional slab of Figure 4, if the x,z-dimensions coincide with those of the four-sided figure shown in Figure 7a, if the gradient G_z were arranged to excite the entire volume between z₁ and z₂, it will be apparent that only the region of the slab between the coordinates z₁ and z₃ would be fully imaged (all primary and secondary phase encodes acquired), since the region of the slab lying between z-coordinates z₄ and z₁ would be outside the excitation volume (between z₁ and z₂) at the end of primary phase encoding.

[0032] In reality, the volume to be imaged will extend further in the z-direction than the slab of Figure 4. Thus, after the first scan has been completed, the volume of the patient originally lying between z-coordinates z₁ and

z_2 has been translated to z-coordinates z_4, z_3 . The volume of the patient lying between z-coordinates z_1 and z_3 has been imaged, and a fresh volume of the patient between z-coordinates z_3 and z_2 has now entered the volume which is excited (between z_1 and z_2). Consequently, after the next scan has been completed, the fresh volume between z_3 and z_2 is imaged, and so on.

[0033] Of course, with the coordinates shown in Figure 7a, a large proportion of the patient's volume which had been imaged on one scan would be imaged also on the next scan. Duplicated data would be averaged to improve the s:n ratio. Accordingly, the excitation volume and the speed of translation may be chosen so that point z_3 moves all the way to point z_1 in the time which one scan takes to perform. The volume which is fully imaged on each scan is now just a single slice, and there is no overlap between the volume fully imaged on one scan and the volume fully imaged on the next scan. Continuous imaging of a patient on the couch 3 moving through the region of good field takes place, and the result is a continuous seamless length of time 3D image data.

[0034] It turns out that a certain amount of overlap between successively imaged volumes can in fact be desirable. Thus, the scheme is most sensitive to errors where the join in the realigned data in hybrid Zk_x space is close to the central $k_x=0$. To guard against artifacts produced by errors in this region it is helpful to use data interpolation to ensure a smooth join or to double collect data so that the central k_x data always comes from a narrow range of positions within the slab. This can be achieved by making the translation velocity smaller so that a distance less than Z_1 to Z_3 is traversed in the time taken to acquire all primary and secondary phase encode steps, or by acquiring the central k_x lines twice, for example if sequentially ordered phase encoding is used the central lines would be acquired in the natural order and again at the end of the series. As another alternative, referring to Figure 8, which is a plan view of four slabs A, B, C, D, successive frequency offsets could be applied to the frequency of the r.f. pulse, so that in the first data collection, the data in volume A was collected. The frequency of the r.f. pulse could then be offset to collect data in volume B. It could then be offset to collect data in volume C. It could then be offset to collect data in volume D. The r.f. frequency could then be reset to collect data in volume A again etc.

[0035] It is possible that there would be discontinuities between the slabs produced in this method. This could be reduced by "walking" a thin slab along the z-axis continuously while acquiring data in an interleaved fashion along the K_y axis (Sliding Interleaved k_y (SLINKY) Acquisition: A Novel 3D MRA Technique with Suppressed Boundary Artifact, JMRI 1998, Volume 8, No. 4, pages 903 to 911, and European Patent Application No. 98308921.0).

[0036] The above discussion has taken place with the assumption that the motion of the object being imaged is insignificant over one run through of all the secondary

phase encode gradients. The assumption holds provided that the sloping line in Figure 7c does not cross the second from the bottom primary phase encode line beyond the second data point of that line. However, the effects of the couch motion while a single run through of secondary phase encode data takes place can in fact be corrected for. In the same way that the motion between the lines was visualised in Figure 7c, the motion during a line could be visualised in Figure 7c by slightly displacing each of the points forming a z line. In other words, according to the invention, a velocity correction is applied to each point, for example, in the form of a phase correction.

[0037] It has been assumed that a separate r.f. pulse is required for each secondary phase encode increment. Of course, it would be possible for a multi-echo sequence to be used, so that a different secondary phase encode gradient was applied before each repeated echo. Suitable pulse trains would be of the generic form termed multi-shot echo planar imaging with a secondary phase encode or multi-shot echo volumar imaging.

[0038] The description has referred to data being assembled in orthogonal arrays in what would be cartesian coordinates, but the manipulation of the data could equally take place in polar coordinates.

[0039] The invention is particularly applicable to magnets having only a narrow region of good field in the z-direction eg. maximum thickness of 3cms. This would apply particularly to shorter magnets. While an annular magnet has been described, the invention is also applicable to other geometries for example C-magnets and including permanent magnets.

[0040] The invention is of course applicable to slice select and phase encode gradients being in the x or y or oblique directions, with appropriate changes to the motion of the volume to be imaged. This invention can also include correction for spatial distortions introduced by main field inhomogeneity and/or gradient non-linearity. The correction could take the form of a real space unwarping or a k space-regridding.

Claims

1. Magnetic resonance imaging apparatus comprising:

- means for applying r.f. excitation pulses to, and collecting volumetric data samples from, a restricted region of the main field of the apparatus (5), transforming the data samples to form a volumetric image of the restricted region, including means for advancing a patient support continuously through the restricted region,
- means (7) for correcting the data samples to compensate for the motion so that the volumet-

ric image formed is of greater length than that of the restricted region (5),

- the volumetric data samples being encoded with secondary phase encoding in the direction of motion of the patient support and with primary phase encoding in a transverse direction, 5
- the correcting means (7) being arranged to compensate successive sets of samples of all secondary phases produced at each primary phase for the motion, 10

characterized in that 15

- the correcting means (7) is arranged to apply a velocity correction to each point of a set of data points corresponding to one run through all the secondary phases corresponding to a respective primary phase, the velocity correction taking account of patient support motion while a single run through all said secondary phases takes place. 20
2. Magnetic resonance imaging apparatus as claimed in Claim 1, in which the correction (7) means is arranged to apply a motion correction to rows of data samples in hybrid real/k-space. 25
 3. Magnetic resonance imaging apparatus as claimed in claim 1, in which the correction means (7) is arranged to apply a phase correction to rows of data samples in k-space. 30
 4. Magnetic resonance imaging apparatus as claimed in any of the claims 1 to 3, in which the primary phase encoding has a greater number of increments than the secondary phase encoding. 35

Patentansprüche 40

1. Gerät zur Bilderzeugung mittels magnetischer Kernresonanz, das Folgendes umfasst: 45
 - Mittel, um einer begrenzten Region des Hauptfelds des Geräts (5) HF-Anregungsimpulse zuzuführen und volumetrische Datenabstastwerte von dieser zu erfassen; um die Datenabstastwerte zu transformieren, um ein volumetrisches Bild der begrenzten Region zu bilden; einschließlich Mitteln zum kontinuierlichen Bewegen einer Patientenauflage durch die begrenzte Region; 50
 - Mittel (7) zum Korrigieren der Datenabstastwerte, um die Bewegung zu kompensieren, so dass das gebildete volumetrische Bild eine größere Länge aufweist als die begrenzte Region 55

- (5);
- wobei die volumetrischen Datenabstastwerte mit sekundärer Phasencodierung in der Bewegungsrichtung der Patientenauflage und mit primärer Phasencodierung in einer Querrichtung codiert werden;
- wobei Korrekturmittel (7) vorgesehen sind, um aufeinander folgende Sätze von Abtastwerten von allen bei jeder primären Phase erzeugten sekundären Phasen entsprechend der Bewegung zu kompensieren, dadurch gekennzeichnet, dass
- die Korrekturmittel (7) vorgesehen sind, um eine Geschwindigkeitskorrektur auf jeden Punkt eines Satzes von Datenpunkten anzuwenden, der einem Durchlauf aller einer jeweiligen primären Phase entsprechenden sekundären Phasen entspricht, wobei die Geschwindigkeitskorrektur die Bewegung der Patientenauflage während eines einzelnen Durchlaufs aller genannten sekundären Phasen berücksichtigt.

2. Gerät zur Bilderzeugung mittels magnetischer Kernresonanz nach Anspruch 1, wobei die Korrekturmittel (7) vorgesehen sind, um eine Bewegungskorrektur auf Reihen von Datenabstastwerten in dem hybriden realen/k-Raum anzuwenden.
3. Gerät zur Bilderzeugung mittels magnetischer Kernresonanz nach Anspruch 1, wobei die Korrekturmittel (7) vorgesehen sind, um eine Phasenkorrektur auf Reihen von Datenabstastwerten in dem k-Raum anzuwenden.
4. Gerät zur Bilderzeugung mittels magnetischer Kernresonanz nach einem der Ansprüche 1 bis 3, wobei die primäre Phasencodierung eine größere Anzahl von Inkrementen hat als die sekundäre Phasencodierung.

Revendications

1. Appareil d'imagerie par résonance magnétique comprenant : 45
 - des moyens pour appliquer des impulsions d'excitation radiofréquence à une région limitée du champ principal de l'appareil (5) et collecter des échantillons de données volumétriques de celle-ci, transformer les échantillons de données pour former une image volumétrique de la région limitée, incluant des moyens pour faire avancer un support de patient de manière continue dans la région limitée ; 50
 - des moyens (7) pour corriger les échantillons de données pour compenser le mouvement de sorte que l'image volumétrique formée est de 55

longueur supérieure à celle de la région limitée (5) ;

- les échantillons de données volumétriques étant codés par un codage de phase secondaire dans la direction de mouvement du support de patient et par un codage de phase principale dans une direction transversale ; 5
- les moyens de correction (7) étant à même de compenser le mouvement de jeux successifs d'échantillons de toutes les phases secondaires produites à chaque phase principale, **caractérisé en ce que** 10
- les moyens de correction (7) sont à même d'appliquer une correction de vitesse à chaque point d'un jeu de points de données correspondant à un passage par toutes les phases secondaires correspondant à une phase principale respective, la correction de vitesse tenant compte du mouvement du support du patient pendant qu'a lieu un passage unique par toutes lesdites phases secondaires. 20

2. Appareil d'imagerie par résonance magnétique suivant la revendication 1, dans lequel les moyens de correction (7) sont à même d'appliquer une correction de mouvement à des rangées d'échantillons de données dans un espace hybride réel/des k. 25

3. Appareil d'imagerie par résonance magnétique suivant la revendication 1, dans lequel les moyens de correction (7) sont à même d'appliquer une correction de phase à des rangées d'échantillons de données dans l'espace des k. 30





4. Appareil d'imagerie par résonance magnétique suivant l'une quelconque des revendications 1 à 3, dans lequel le codage de phase principale comporte un nombre d'incrémentes plus élevé que le codage de phase secondaire. 35

40

45

50

55

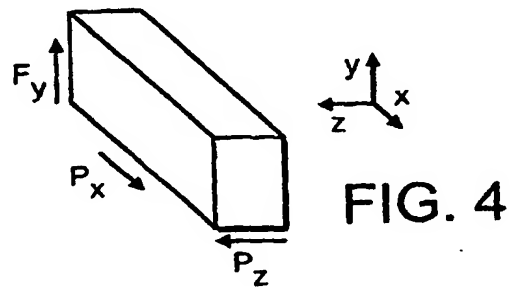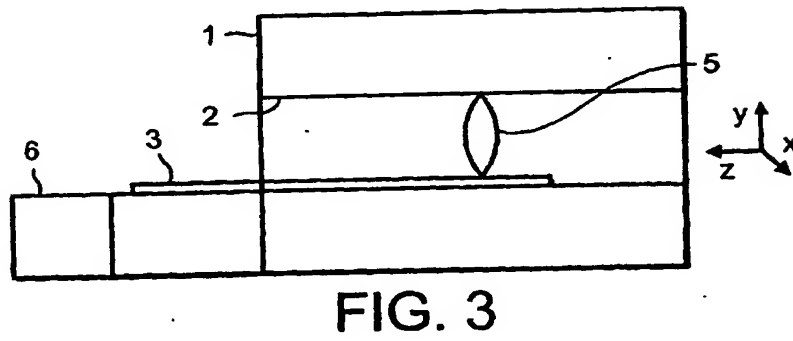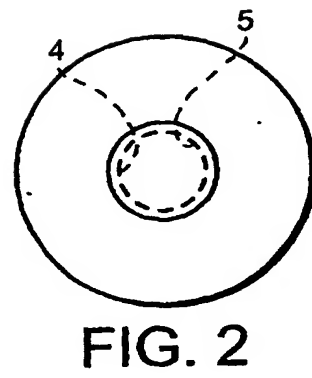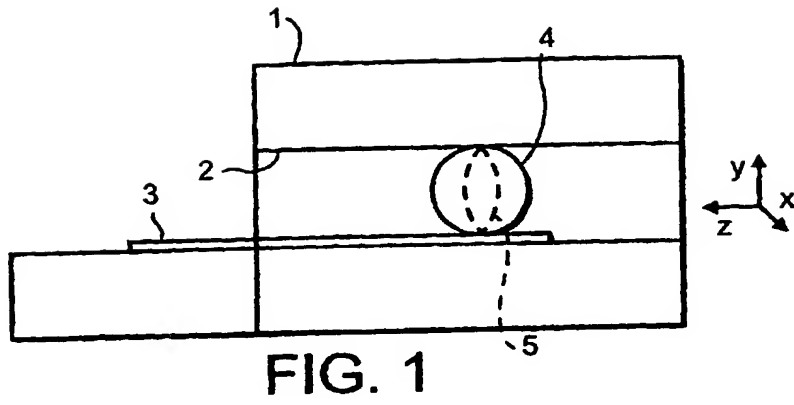


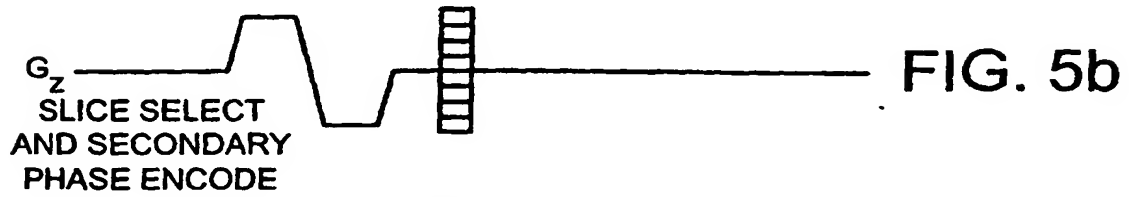



FIG. 6b

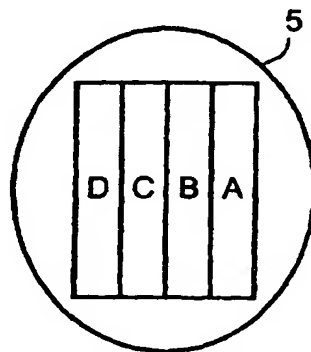



FIG. 8




FIG. 7a

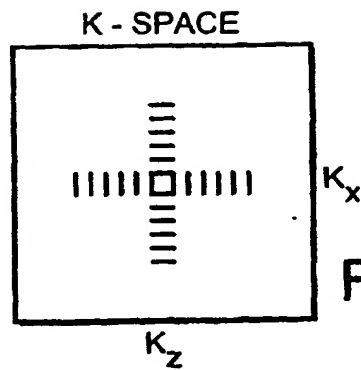


FIG. 7b

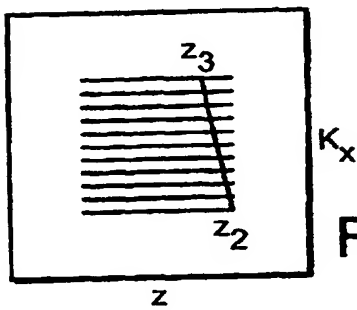


FIG. 7c

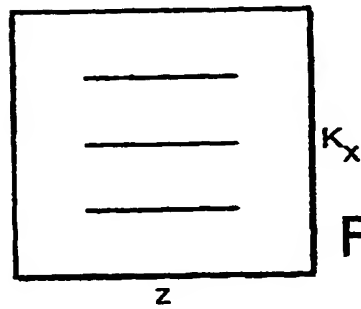


FIG. 7d

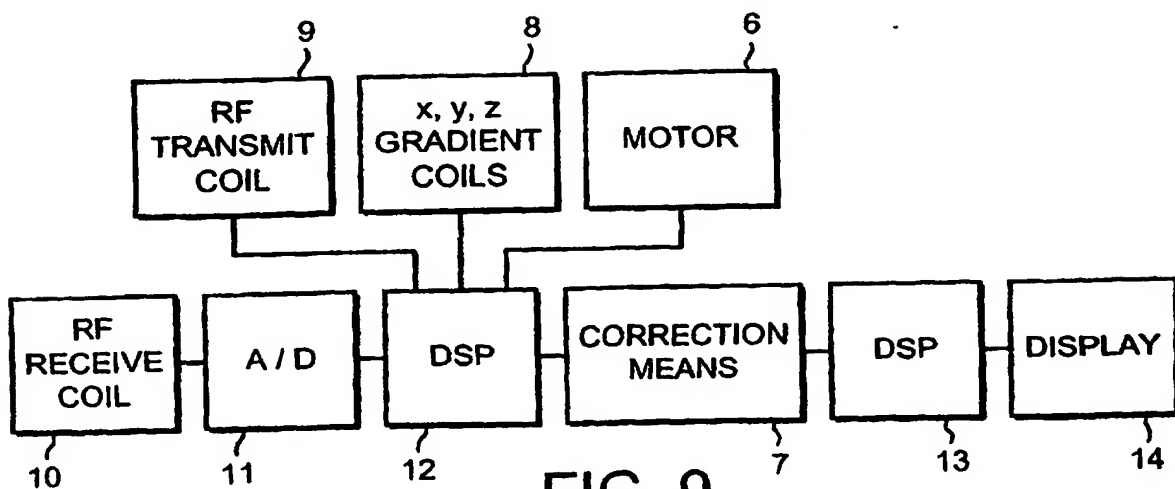


FIG. 9

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

